

Highly efficient 400W near-fundamental-mode green thin-disk laser

STEFAN PIEHLER^{1,*}, TOM DIETRICH¹, MARTIN RUMPEL¹, THOMAS GRAF¹, AND MARWAN ABDOU AHMED¹

¹Institut für Strahlwerkzeuge, Universität Stuttgart, Pfaffenwaldring 43, Stuttgart, DE-70569

*Corresponding author: stefan.piehler@ifsw.uni-stuttgart.de

Compiled October 26, 2015

We report on the efficient generation of continuous-wave, high-brightness green laser radiation. Green lasers are particularly interesting for reliable and reproducible deep-penetration welding of copper or for pumping Ti:Sa oscillators. By intra-cavity second harmonic generation in a thin-disk laser resonator designed for fundamental-mode operation, an output power of up to 403 W is demonstrated at a wavelength of 515 nm with almost diffraction-limited beam quality. The unprecedented optical efficiency of 40.7% of green output power with respect to the pump power of the thin-disk laser is enabled by the intra-cavity use of a highly efficient grating waveguide mirror, which combines the functions of wavelength stabilization and spectral narrowing as well as polarization selection in a single element. © 2015 Optical Society of America

OCIS codes: (140.3480) Lasers, diode-pumped; (140.3580) Lasers, solid-state; (140.3515) Lasers, frequency doubled; (050.1950) Diffraction gratings.

<http://dx.doi.org/10.1364/ao.XX.XXXXXX>

The emergence of e-mobility as well as the large-scale development and installation of renewable energy sources has driven the demand for reliable and durable high-power electric circuitry and battery technology. In this context, reliable, efficient and reproducible deep penetration welding processes of copper have been of increasing interest in the last few years. Due to its unique material properties, however, reliable laser welding of copper is still a challenging task: Its high thermal conductivity impedes efficient localized heat deposition, while the very low absorptivity of copper in the near-infrared regime at room temperature of below 5% along with the sudden increase of absorption at the melting point makes the welding process very challenging to control and susceptible to variations in the surface conditions of the workpiece.

Both of these problems can be addressed by using high-power, high-brightness frequency-doubled solid-state laser sources emitting in the green wavelength range. At these wavelengths the absorptivity of copper at room temperature amounts

to 40% [1]. Together with the smaller focus diameters and hence higher intensities achievable by close-to fundamental-mode continuous-wave laser beams this potentially leads to continuous high-quality weld seams even at high feed rates [2]. Therefore, both reproducibility and quality of copper welding technology could be taken to a new level by using a high-power, high-brightness green laser source. Frequency-doubled thin-disk lasers are well-suited for the task of copper welding due to their insensitivity to back-reflections from the workpiece and the potential for high output powers at good beam quality.

Apart from direct material processing applications, frequency-doubled high-power laser sources emitting in the green spectral range are very interesting pump sources for high-power Ti:Sa oscillators, as high-power laser diodes are not available in this wavelength regime. Frequency-doubled thin-disk lasers have been successfully used as pump sources in various high-power or high-energy Ti:Sa-based laser systems [3, 4]. For the investigation of Ti:Sa laser oscillators which are themselves based on the thin-disk laser concept, high-power green pump sources are a prerequisite to overcome the limited gain imposed by the very short crystal length [5].

So far, however, high average output powers in the visible spectral range have been demonstrated mainly for pulsed systems. By intra-cavity second-harmonic generation (SHG) of a Q-switched thin-disk laser emitting pulses with duration in the order of 100 ns, up to 1.8 kW of average output power have been achieved [6]. Recently, extra-cavity frequency conversion has been demonstrated in the picosecond regime with up to 820 W of average output power and a very high SHG conversion efficiency of about 70% [7, 8].

For high-power thin-disk lasers operating in continuous-wave, the efficiency of intra-cavity frequency conversion is still limited by the losses and thermal lensing issues induced by additional intra-cavity elements needed in order to achieve stable phase-matching conditions. So far, up to 470 W of frequency-doubled output power were demonstrated in multimode operation [9] using conventional approaches for frequency and polarization control. By using a special grating-waveguide end-mirror (GWM) in a highly-multimode thin-disk laser resonator, up to 1 kW of frequency-doubled output power have recently been demonstrated in CW operation [10].

Current limitations of common approaches for intra-cavity frequency doubling are apparent when it comes to nearly

diffraction-limited thin-disk lasers: The highest output power demonstrated to date is 255 W with an overall optical efficiency of 30% [11]. In the new approach reported in the present paper we exploit the power capability of GWMs to scale the output of intra-cavity frequency-doubled continuous-wave thin-disk lasers with almost diffraction-limited beam quality. By the use of such a highly efficient grating mirror which combines the functions of wavelength stabilization, spectral narrowing and polarization selection in a single element, up to 403 W of output power at a wavelength of 515 nm with almost diffraction-limited beam-quality could be demonstrated at an unprecedented total optical efficiency of about 40% of frequency-doubled output power versus pump power incident to the disk laser. To the best of our knowledge, this is both the highest reported output power as well as the highest efficiency that has been reported so far for a near-fundamental mode frequency doubled CW thin-disk laser.

For stable phase-matching conditions, the spectral width of the oscillating laser radiation has to be narrowed down sufficiently and stabilized in order to reliably match the spectral acceptance bandwidth of the nonlinear crystal. Furthermore, for critical phase-matching, a stable and well-defined state of linear polarization has to be guaranteed. Usually, a set of one or multiple etalons are used for bandwidth narrowing and frequency stabilization, whereas thin-film polarizers or Brewster-plates are used for polarization control [9]. Each of these additional elements inside the resonator increase the overall round-trip losses for a given cavity and therefore diminish the overall efficiency. Furthermore, thermally induced distortions arising from these additional elements limit the resonator stability at increasing average powers, resulting in significant degradations of the beam quality and limitations of the usable power range. This is most pronounced in fundamental-mode operation.

In our approach, the functions of wavelength and polarization selection are combined in a single reflective diffractive element, reducing both round-trip losses as well as thermally induced distortions as compared to the use of transmissive intra-cavity elements. The highly efficient grating-waveguide-mirror (GWM) [12] is deployed as one of the cavity end mirrors. The GWM is operated in Littrow configuration, where the -1st diffraction order is fed back into the resonator. As, due to the dispersion of the grating, the Littrow angle exhibits strong wavelength dependence, this feedback mechanism exerts a strong wavelength selectivity. Furthermore, being polarization selective by design, the use of the GWM leads to a pure linear polarization of the intracavity laser beam.

The resonator setup used for the experimental investigations is shown in Fig. 1. A 130 μm thick 10 at.% Yb:YAG disk provided by TRUMPF Laser GmbH with a diameter of 15 mm was mounted on a diamond heat sink and used throughout all of our experiments. The mounted disk had a radius of curvature of 3.82 m. The disk was pumped into the so-called zero-phonon-line at a wavelength of 969 nm using spectrally stabilized laser diodes, in order to reduce the thermal load in the laser crystal as compared to standard pumping around a wavelength of 940 nm [13]. The resonator was designed to provide about 70% of overlap between the fundamental mode and the pump spot with a diameter of 5.5 mm and was subsequently fine tuned in order to achieve close-to diffraction-limited beam quality throughout the power range.

In a first step, the performance of the GWM was tested in the resonator without SHG. For this purpose the LBO crystal provided by Cristal Laser was removed and the concave end-

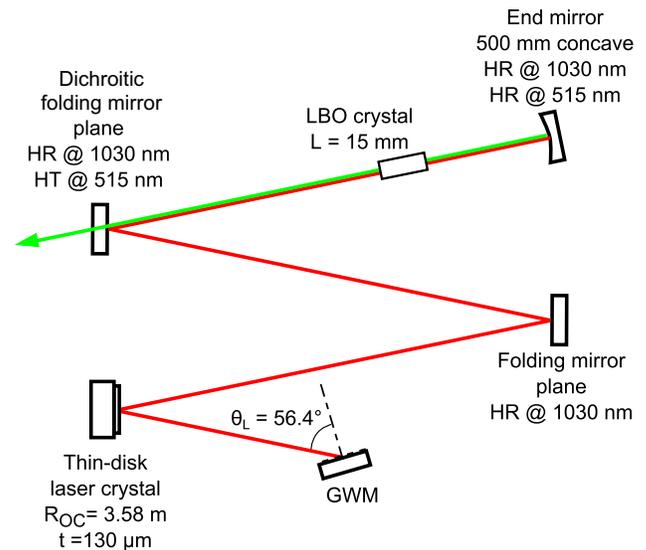


Fig. 1. Experimental setup.

mirror was replaced by a concave output coupler with 4% of transmission. As shown by Fig. 2 in this set-up the laser emitted 620 W of output power with an optical efficiency of 51.6%. When the GWM was replaced by a standard plane HR end mirror, the laser emitted up to 730 W of power in an unpolarized beam with an optical efficiency of 58%. In both cases the beam quality at maximum output power was measured to be $M_x^2 < 1.3$ in the horizontal plane (drawing plane in Fig. 1) and $M_y^2 < 1.2$ in the vertical plane.

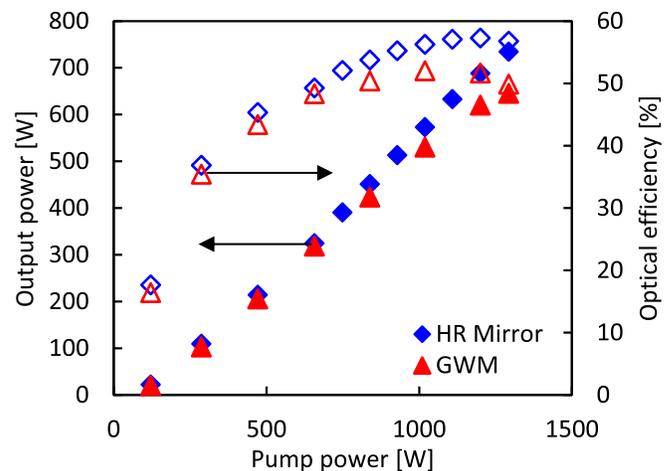


Fig. 2. Performance of the fundamental-mode laser without SHG either with a standard HR mirror (diamonds) or the GWM (triangles) used as end-mirror.

The comparison shows that the use of the GWM reduces the optical efficiency by moderate 6.4% but with the significant advantage of a linearly polarized output in a significantly narrower and stable spectral bandwidth as shown in Fig. 3. With the GWM used as end mirror the emitted spectral bandwidth was measured to be $\Delta\lambda \approx 20$ pm FWHM at a central wavelength of 1030.07 nm. In the setup with the standard HR end mirror the spectral width was approximately 1.5 nm $< \Delta\lambda < 2$ nm FWHM which is two orders of magnitude wider.

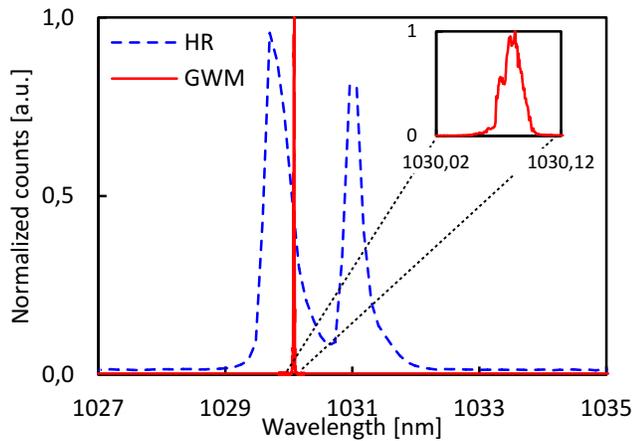


Fig. 3. Measured spectrum of the laser beam emitted from the laser without SHG either with a standard HR mirror (dashed line) or the GWM (solid line) used as the end-mirror. The measurements were taken at a pump power of 1 kW.

After the confirmation of the stable spectral narrowing obtained by means of the GWM, the lithium-triborate (LBO) crystal was introduced for the resonator (now again in the setup shown in Fig. 1) for intra-cavity second-harmonic generation. The LBO crystal was cut for type I phase-matching at a temperature of 50°C. The size of the crystal was (15 × 4 × 4) mm³. To obtain an efficient conversion efficiency, the necessary high power densities in the crystal were reached by designing the cavity for a beam diameter at the crystal's position of about 460 μm. Furthermore, the cavity was adapted with respect to an assumed maximum thermal lens in the thin-disk-laser crystal of about -0.02 m⁻¹ as well as up to 0.5 m⁻¹ in the LBO crystal, leading to an almost constant beam diameter both in the LBO and on the disk throughout the intended power range. The performance of the frequency doubled laser is shown in Fig. 4.

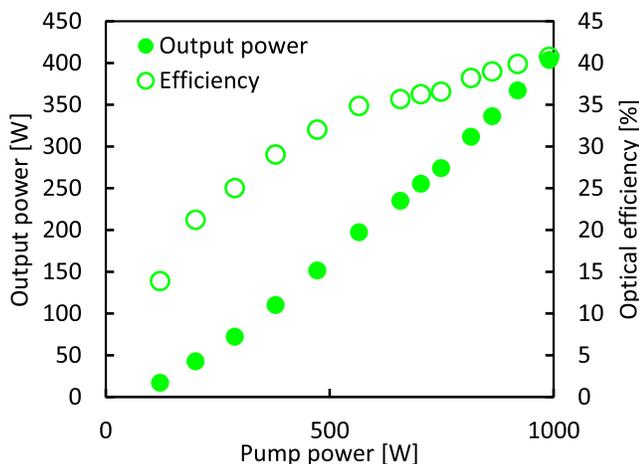


Fig. 4. Overall performance of the frequency-doubled laser.

Up to 403 W green laser radiation was generated at an unprecedented overall optical efficiency of 40.7% with respect to the pump power of the thin-disk laser. At maximum pump power of 1 kW, the fundamental IR laser power leaking through the dichroitic folding mirror was measured to be less than 2 W and

hence negligibly small. With the overall efficiency still increasing at this point, further power scaling of this system should be possible in principle with more available pump power.

As can be seen from Fig. 5, a slight degradation of beam quality was observed starting at around 300 W of output power. While the beam quality can be considered as diffraction-limited up to an output power of 300 W ($M^2 < 1.35$), an increase of M^2 value was observed at higher powers, predominantly in the vertical plane. This effect is presumably due to a power-dependent thermally-induced change of the critical phase-matching angle, so that either the crystal has to be slightly realigned at each power level, or the temperature of the crystal oven has to be adapted accordingly. By readjusting the crystal for maximum efficiency at output powers above 300 W, the beam quality could be slightly improved again for the higher output powers. However, due to the comparatively small aperture of the currently available crystal of 4×4 mm², the angular tuning range was too limited to allow for more significant optimizations.

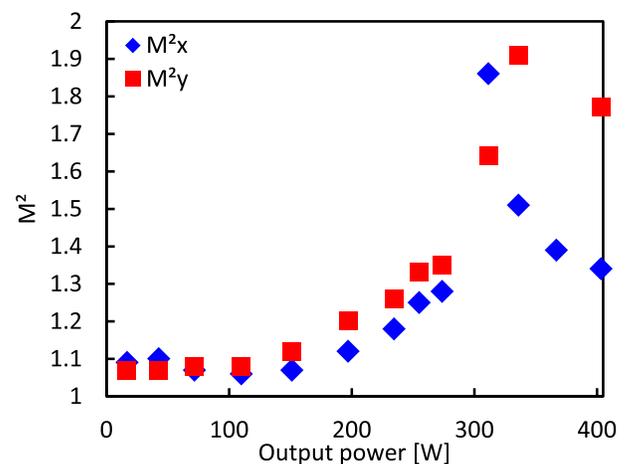


Fig. 5. Measured beam quality of the frequency-doubled output in the horizontal (diamonds) and vertical (squares) planes, respectively, as a function of the output power.

In summary we have demonstrated an intra-cavity frequency-doubled thin-disk laser providing a green output power of up to 403 W with an unprecedented optical efficiency of 40.7% and close to diffraction-limited beam quality. This high performance was achieved by using efficient grating-waveguide mirrors for combined wavelength and polarization selection.

The onset of thermally induced effects in the LBO crystal observed at output powers exceeding 300 W indicate that the length of the LBO crystal should be optimized and a better control of the crystal temperature will be required for further power scaling.

Funding. The research leading to these results has received funding from the European Union Seventh Framework Programme [ICT-2013.3.2- Photonics] under grant agreement no. 619177 (Project TiSa-TD, www.tisa-td.eu).

REFERENCES

1. S. Engler, R. Ramsayer, and R. Poprawe, *Physics Procedia* **12**, 342 (2011).
2. A. Hess, R. Schuster, A. Heider, R. Weber, and T. Graf, *Physics Procedia* **12**, 88 (2011).

3. R. Pohl, A. Antognini, F. Nez, F. D. Amaro, F. Biraben, J. a. M. R. Cardoso, D. S. Covita, A. Dax, S. Dhawan, L. M. P. Fernandes, A. Giesen, T. Graf, T. W. Hänsch, P. Indelicato, L. Julien, C.-Y. Kao, P. Knowles, E.-O. Le Bigot, Y.-W. Liu, J. a. M. Lopes, L. Ludhova, C. M. B. Monteiro, F. Mulhauser, T. Nebel, P. Rabinowitz, J. M. F. dos Santos, L. a. Schaller, K. Schuhmann, C. Schwob, D. Taqqu, J. F. C. a. Veloso, and F. Kottmann, *Nature* **466**, 213 (2010).
4. J. Klein and J. D. Kafka, *Nature Photonics* **4**, 289 (2010).
5. <http://www.tisa.td.eu/> .
6. C. Stolzenburg, W. Schüle, V. Angrick, M. Bouzid, and A. Killi, in "Proc. SPIE 8959," , vol. 8959 (2014), vol. 8959, p. 89590O.
7. J.-P. Negel, A. Loescher, A. Voss, D. Bauer, D. Sutter, A. Killi, M. Abdou Ahmed, and T. Graf, in "Proc. SPIE 9342," , vol. 9342 (2015), vol. 9342, p. 93420V.
8. J.-P. Negel, A. Loescher, A. Voss, D. Bauer, D. Sutter, A. Killi, M. Abdou Ahmed, and T. Graf, *Optics express* **39**, 7054 (2015).
9. T. Gottwald, V. Kuhn, S.-S. Schad, C. Stolzenburg, and A. Killi, in "Proc. SPIE 8898," , vol. 8898 (2013), vol. 8898, p. 88980P.
10. M. Abdou Ahmed, M. Rumpel, M. Bouzid, C. Stolzenburg, A. Killi, M. Moeller, C. Moormann, and T. Graf, in "Proc. SPIE 9135," (2014), pp. 9135–12.
11. S. Weiler, A. Hangst, C. Stolzenburg, I. Zawischa, D. Sutter, A. Killi, S. Kalfhues, U. Kriegshaeuser, M. Holzer, and D. Havrilla, *Spie* **8239**, 823907 (2012).
12. M. Rumpel, A. Voss, M. Moeller, F. Habel, C. Moormann, M. Schacht, T. Graf, and M. A. Ahmed, *Optics Letters* **37**, 4188 (2012).
13. B. Weichelt, A. Voss, M. Abdou Ahmed, and T. Graf, *Optics Letters* **37**, 3045 (2012).

EXTENDED REFERENCES

1. S. Engler, R. Ramsayer, and R. Poprawe, "Process Studies on Laser Welding of Copper with Brilliant Green and Infrared Lasers," *Physics Procedia* 12, 342 (2011).
2. A. Hess, R. Schuster, A. Heider, R. Weber, and T. Graf, "Continuous Wave Laser Welding of Copper with Combined Beams at Wavelengths of 1030 nm and of 515 nm," *Physics Procedia* 12, 88 (2011).
3. R. Pohl, A. Antognini, F. Nez, F. D. Amaro, F. Biraben, J. a. M. R. Cardoso, D. S. Covita, A. Dax, S. Dhawan, L. M. P. Fernandes, A. Giesen, T. Graf, T. W. Hänsch, P. Indelicato, L. Julien, C.-Y. Kao, P. Knowles, E.-O. Le Bigot, Y.-W. Liu, J. a. M. Lopes, L. Ludhova, C. M. B. Monteiro, F. Mulhauser, T. Nebel, P. Rabinowitz, J. M. F. dos Santos, L. a. Schaller, K. Schuhmann, C. Schwob, D. Taqqu, J. F. C. a. Veloso, and F. Kottmann, "The size of the proton," *Nature* 466, 213 (2010).
4. J. Klein and J. D. Kafka, "The Ti: Sapphire laser: the flexible research tool," *Nature Photonics* 4, 289 (2010).
5. <http://www.tisa.td.eu/>.
6. C. Stolzenburg, W. Schüle, V. Angrick, M. Bouzid, and A. Killi, "Multi-kW IR and green nanosecond thin-disk lasers," in "Proc. SPIE 8959," , vol. 8959 (2014), vol. 8959, p. 89590O.
7. J.-P. Negel, A. Loescher, A. Voss, D. Bauer, D. Sutter, A. Killi, M. Abdou Ahmed, and T. Graf, "Ultrafast thin-disk multipass amplifier with 1.4 kW average power and 4.7 mJ pulse energy at 1030 nm converted to 820 W and 2.7 mJ at 515 nm," in "Proc. SPIE 9342," , vol. 9342 (2015), vol. 9342, p. 93420V.
8. J.-P. Negel, A. Loescher, A. Voss, D. Bauer, D. Sutter, A. Killi, M. Abdou Ahmed, and T. Graf, "Ultrafast thin-disk multipass laser amplifier delivering 1.4 kW (4.7 mJ, 1030 nm) average power converted to 820 W at 515 nm and 234 W at 343 nm," *Optics express* 39, 7054 (2015).
9. T. Gottwald, V. Kuhn, S.-S. Schad, C. Stolzenburg, and A. Killi, "Recent developments in high power thin disk lasers at TRUMPF Laser," in "Proc. SPIE 8898," , vol. 8898 (2013), vol. 8898, p. 88980P.
10. M. Abdou Ahmed, M. Rumpel, M. Bouzid, C. Stolzenburg, A. Killi, M. Moeller, C. Moormann, and T. Graf, "A 1 kW frequency doubled Yb:YAG CW thin-disk laser," in "Proc. SPIE 9135," (2014), pp. 9135–12.
11. S. Weiler, A. Hangst, C. Stolzenburg, I. Zawischa, D. Sutter, A. Killi, S. Kalfhues, U. Kriegshaeuser, M. Holzer, and D.5 Havrilla, "Frequency doubled high-power disk lasers in pulsed and continuous-wave operation," *Spie* 8239, 823907 (2012).
12. M. Rumpel, A. Voss, M. Moeller, F. Habel, C. Moormann, M. Schacht, T. Graf, and M. A. Ahmed, "Linearly polarized, narrow-linewidth, and tunable Yb:YAG thin-disk laser," *Optics Letters* 37, 4188 (2012).
13. B. Weichelt, A. Voss, M. Abdou Ahmed, and T. Graf, "Enhanced performance of thin-disk lasers by pumping into the zero-phonon line," *Optics Letters* 37, 3045 (2012).